


SmartLine-Laser 360° Set



360° line laser

The SmartLine-Laser 360° set is used for the exact alignment of horizontals and inclinations. The device automatically aligns itself in a time-saving way and warns if it is outside the levelling range. The light and robust compact tripod, the universal mount and the integrated hand-held receiver mode offer a wide range of applications.

- Exact horizontal alignment
- Time-saving automatic alignment
- Easy alignment of slopes
- Ideal for work close to the ceiling
- Device issues warning when leaving the levelling range
- With integrated handheld receiver mode
- Light and robust compact tripod 150 cm
- Universal mount
- Pendulum restraint for safe transport

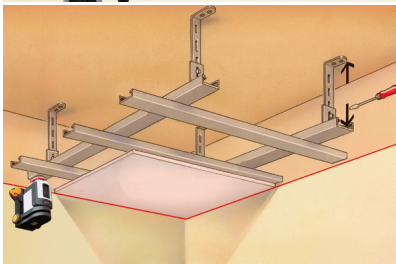

TECHNICAL SPECIFICATIONS

SELF-LEVELLING RANGE	± 5°
ACCURACY	± 0.4 mm / m
LEVELLING	automatic
VISIBILITY (TYPICAL)*	15 m
WORKING RANGE WITH HAND RECEIVER	(depends on how the technology affects the difference in brightness) 30 m
LASER WAVELENGTH	635 nm
LASER CLASS	2 / < 1 mW (EN 60825-1:2014/AC:2017)
POWER SOURCE	4 x 1.5V LR6 (AA)
OPERATING TIME	approx. 35 hours
OPERATING CONDITIONS	0°C ... 40°C, max. humidity 80% rH, no condensation, max. working altitude 4000 m above sea level
STORAGE CONDITIONS	-10°C ... 70°C, max. humidity 80% rH
DIMENSIONS (W X H X D)	105 mm x 126 mm x 76 mm
WEIGHT	514 g

